

CSGE602055 Operating Systems  
CSF2600505 Sistem Operasi  
Week 04: Addressing, Shared Lib, & Pointer

C. BinKadal

Sendirian Berhad

<https://doc0S.vlsm.org/Slides/os04.pdf>

Always check for the latest revision!

REV418: Tue 30a Jan 2024 22:00

# OS241<sup>3</sup>): Operating Systems Schedule 2023 - 2

Week	Topic <sup>1)</sup>	OSC10 <sup>2)</sup>
Week 00	Overview (1), Assignment of Week 00	Ch. 1, 2
Week 01	Overview (2), Virtualization & Scripting	Ch. 1, 2, 18.
Week 02	Security, Protection, Privacy, & C-language.	Ch. 16, 17.
Week 03	File System & FUSE	Ch. 13, 14, 15.
Week 04	Addressing, Shared Lib, & Pointer	Ch. 9.
Week 05	Virtual Memory	Ch. 10.
Week 06	Concurrency: Processes & Threads	Ch. 3, 4.
Week 07	Synchronization & Deadlock	Ch. 6, 7, 8.
Week 08	Scheduling + W06/W07	Ch. 5.
Week 09	Storage, Firmware, Bootloader, & Systemd	Ch. 11.
Week 10	I/O & Programming	Ch. 12.

<sup>1)</sup> For schedule, see <https://os.vlsm.org/#idx02>

<sup>2)</sup> Silberschatz et. al.: **Operating System Concepts**, 10<sup>th</sup> Edition, 2018.

<sup>3)</sup> This information will be on **EVERY** page two (2) of this course material.

- Text Book** — Any recent/decent OS book. Eg. (**OSC10**) Silberschatz et. al.: **Operating System Concepts**, 10<sup>th</sup> Edition, 2018. (See <https://codex.cs.yale.edu/avi/os-book/OS10/>).
- Resources** (<https://os.vlsm.org/#idx03>)
  - SCELE** — <https://scele.cs.ui.ac.id/course/view.php?id=3743>.  
The enrollment key is **XXX**.
  - Download Slides and Demos from GitHub.com** —  
(<https://github.com/os2xx/docOS/>)  
[os00.pdf \(W00\)](#), [os01.pdf \(W01\)](#), [os02.pdf \(W02\)](#), [os03.pdf \(W03\)](#), [os04.pdf \(W04\)](#), [os05.pdf \(W05\)](#),  
[os06.pdf \(W06\)](#), [os07.pdf \(W07\)](#), [os08.pdf \(W08\)](#), [os09.pdf \(W09\)](#), [os10.pdf \(W10\)](#).
  - Problems**  
[195.pdf \(W00\)](#), [196.pdf \(W01\)](#), [197.pdf \(W02\)](#), [198.pdf \(W03\)](#), [199.pdf \(W04\)](#), [200.pdf \(W05\)](#),  
[201.pdf \(W06\)](#), [202.pdf \(W07\)](#), [203.pdf \(W08\)](#), [204.pdf \(W09\)](#), [205.pdf \(W10\)](#).
  - LFS** — <http://www.linuxfromscratch.org/lfs/view/stable/>
  - OSP4DISS** — <https://osp4diss.vlsm.org/>
  - This is How Me Do It!** — <https://doit.vlsm.org/>
    - PS: "Me" rhymes better than "I", duh!

# Agenda

- 1 Start
- 2 OS241 Schedule
- 3 Agenda
- 4 Week 04: Topics
- 5 OSC10 (Silberschatz) Chapter 9: Main Memory
- 6 Week 04: Addressing, Shared Lib, & Pointer
- 7 Paging
- 8 Addressing
- 9 Translation
- 10 Memory
- 11 Variables and File Formats
- 12 Linux Libraries (1)
- 13 Linux Libraries (2)

# Agenda (2)

- 14 Makefile
- 15 00-global-variables
- 16 Memory Map
- 17 01-local-variables
- 18 02-pointers
- 19 03-pointers-of-pointers
- 20 04-pointers-of-pointers-of-pointers
- 21 05-chrptr-vs-intptr
- 22 06-pointer-address
- 23 07-addresses
- 24 08-passing-parameters
- 25 09-struct

# Week 04 Addressing: Topics<sup>1</sup>

- Bits, bytes, and words
- Numeric data representation and number bases
- Representation of records and arrays

---

<sup>1</sup>Source: ACM IEEE CS Curricula

- Explain why everything is data, including instructions, in computers. [Familiarity]
- Explain the reasons for using alternative formats to represent numerical data. [Familiarity]
- Describe the internal representation of non-numeric data, such as characters, strings, records, and arrays. [Familiarity]

---

<sup>1</sup>Source: ACM IEEE CS Curricula

- OSC10 Chapter 9: Main Memory
  - Background
  - Contiguous Memory Allocation
  - Paging
  - Structure of the Page Table
  - Swapping
  - Example: The Intel 32 and 64-bit Architectures
  - Example: ARMv8 Architecture



# Week 04: Addressing, Shared Lib, & Pointer

- This will be a difficult week
  - Pray! Pray! We got to pray just to make it today (McH)!
  - Turn To Page 394 (HP3)!
- Hardware Address Protection
- Binding & Linking
  - Address Binding
  - Address Space: Logical & Physical
  - Dynamic & Static Linking
  - MMU: Memory Management Unit
  - Base and Limit Registers
  - Swapping
  - Mobile Systems Problem: no swap
- Memory Allocation
  - Contiguous Allocation
  - Multiple-variable-partition Allocation
  - First, Best, Worst Fit Allocation Strategy
- Fragmentation: External / Internal / Compaction

# Paging

- Logical/Virtual Address
  - Logical Memory Blocks: Pages
  - Page Number + Page Offset
- Page Table
  - Page number index  $\Rightarrow$  frame number
  - PTE: Page Table Entry
  - Page Flags: Valid/ Invalid
  - TLB: Translation Look-aside Buffer (Associative Memory).
  - Two-Level Page-Table Scheme
    - OPT: Outer Page Table (P1)
    - PT: Page Table (P2)
  - Three-Level Page-Table Scheme
  - Hashed Page Tables
  - Inverted Page Table
- Physical Address
  - Physical Memory Blocks: Frames
  - Offset (D)
  - Hierarchical Page Tables

# Addressing (Eg. 16 bits)

16 Bits Logical Address Table (HEX)																Examples				
ADDR	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F	bits	L/B	PTR	VALUE
000X	A0	A1	A2	A3	A4	A5	A6	A7	A8	A9	AA	AB	AC	AD	AE	AF	8	—	<b>[0008]</b>	<b>A8</b>
001X	B0	B1	B2	B3	B4	B5	B6	B7	B8	B9	BA	BB	BC	BD	BE	BF	8	—	<b>[0014]</b>	<b>B4</b>
002X	C0	C1	C2	C3	C4	C5	C6	C7	C8	C9	CA	CB	CC	CD	CE	CF	8	—	<b>[0015]</b>	<b>B5</b>
003X	D0	D1	D2	D3	D4	D5	D6	D7	D8	D9	DA	DB	DC	DD	DE	DF	16	LE	<b>[0014]</b>	<b>B5 B4</b>
004X	0A																16	BE	<b>[0014]</b>	<b>B4 B5</b>
⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	32	LE	<b>[0014]</b>	<b>B7 B6 B5 B4</b>
FFFX																	1 address == 1 byte LE: Little Endian BE: Big Endian			

# Address Translation Scheme

Address		Binary									
DEC	HEX	OFFSET	PG	OFF	PG	OFF	PAGE	OFF	PAGE	OFF	
00	00	00000	0	0000	00	000	000	00	0000	0	
01	01	00001	0	0001	00	001	000	01	0000	1	
02	02	00010	0	0010	00	010	000	10	0001	0	
03	03	00011	0	0011	00	011	000	11	0001	1	
04	04	00100	0	0100	00	100	001	00	0010	0	
05	05	00101	0	0101	00	101	001	01	0010	1	
06	06	00110	0	0110	00	110	001	10	0011	0	
07	07	00111	0	0111	00	111	001	11	0011	1	
08	08	01000	0	1000	01	000	010	00	0100	0	
09	09	01001	0	1001	01	001	010	01	0100	1	
10	0A	01010	0	1010	01	010	010	10	0101	0	
11	0B	01011	0	1011	01	011	010	11	0101	1	
12	0C	01100	0	1100	01	100	011	00	0110	0	
13	0D	01101	0	1101	01	101	011	01	0110	1	
14	0E	01110	0	1110	01	110	011	10	0111	0	
15	0F	01111	0	1111	01	111	011	11	0111	1	
16	10	10000	1	0000	10	000	100	00	1000	0	
17	11	10001	1	0001	10	001	100	01	1000	1	
18	12	10010	1	0010	10	010	100	10	1001	0	
19	13	10011	1	0011	10	011	100	11	1001	1	
20	14	10100	1	0100	10	100	101	00	1010	0	
21	15	10101	1	0101	10	101	101	01	1010	1	
22	16	10110	1	0110	10	110	101	10	1011	0	
23	17	10111	1	0111	10	111	101	11	1011	1	
24	18	11000	1	1000	11	000	110	00	1100	0	
25	19	11001	1	1001	11	001	110	01	1100	1	
26	1A	11010	1	1010	11	010	110	10	1101	0	
27	1B	11011	1	1011	11	011	110	11	1101	1	
28	1C	11100	1	1100	11	100	111	00	1110	0	
29	1D	11101	1	1101	11	101	111	01	1110	1	
30	1E	11110	1	1110	11	110	111	10	1111	0	
31	1F	11111	1	1111	11	111	111	11	1111	1	

# Memory (20 bits)

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
0000X	A0	A1	A2	A3	A4	A5	A6	A7	A8	A9	AA	AB	AC	AD	AE	AF
0001X	B0	B1	B2	B3	B4	B5	B6	B7	B8	B9	BA	BB	BC	BD	BE	BF
0002X	C0	C1	C2	C3	C4	C5	C6	C7	C8	C9	CA	CB	CC	CD	CE	CF
0003X	D0	D1	D2	D3	D4	D5	D6	D7	D8	D9	DA	DB	DC	DD	DE	DF
FFFFX																

# Variables and File Formats

- Variable (8 bits)
  - E.g., `int ii=10;`
    - Variable Name: `'ii'`
    - Variable Value:  $10_{10} == 0x\ 0A$
    - Variable Meaning & Context: `integer`
    - Variable Logical Address: `0x\ 0040`  
 $\implies [0x\ 0040] == 0x\ 0A$
- Multiple Address Variable ( $> 1$  byte size)
  - Little-Endian (LE)
  - Big-Endian (BE)
  - Bi-Endian
- Executable File Format
  - Ancient Linux/Unix: Assembler Output  $\rightarrow$  `[a.out]`.
  - iOS, MacOS: Mach-Output (Mach-O).
  - Linux: Executable and Linking Format (ELF).
  - Windows: Portable Executable (PE)  $\rightarrow$   
`[.acm, .ax, .cpl, .dll, .drv, .efi, .exe, .mui, .ocx, .scr, .sys, .tsp]`.

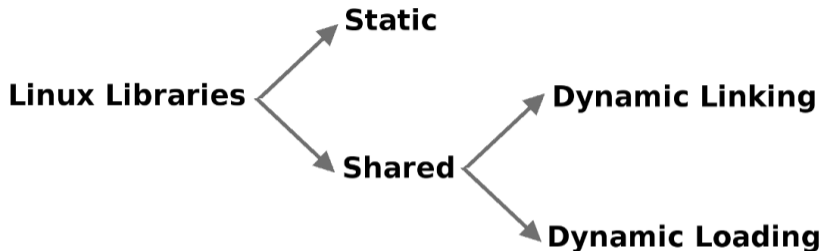


Figure: Linux Libraries

- Static Libraries (embedded in the program).
  - Self contained
  - StaticLib.a
- Shared Libraries
  - Dynamic Linking (run-time.so).
  - Dynamic Loading (controlled by the program, DL-API).

## Linux Libraries (2)

- `putchar(char)`
- `getpid()`
- `getppid()`
- `sprintf(char*, const char*)`
- `fflush(NULL)`
- `MSIZE1 (10k) MSIZE2 (20k) MSIZE3 (50k) MSIZE4 (100k) MSIZE5 (1M) MSIZE6 (10M) MSIZE1`
- `top`
  - PID (Process Id), PPID (Parent PID), %MEM (Memory), VIRT (Virtual Image KiB), RES (Residen Size KiB), SHR (Shared Memory KiB), SWAP (Swapped Size KiB), CODE (Code Size KiB), DATA (Data+Stack KiB), USED (Res+Swap Size KiB).
  - Save: `~/.toprc`
  - `top -b -n 1 -pYOUR_PID`
- `malloc(size_t)`
- `free(void*)`
- `system(const char*)`



# Makefile

```
CC=gcc
P00=00-global-variables
P01=01-local-variables
...

EXECS= \
    $(P00) \
    $(P01) \
...

DEMOFILES=\
    demo-file1.txt \
    demo-file2.txt \
...

all: $(EXECS)

$(P00): $(P00).c
    $(CC) $(P00).c -o $(P00) -Xlinker -Map=$(P00).map
...

$(P04): $(P04).c
    $(CC) $(P04).c -o $(P04)
...
clean:
    rm -f ${EXECS}
...
demo:
    bash .shsh
```

# 00-global-variables

```
/* Global Variables in Data Segment*/
```

```
char  varchr0='a';  
char  varchr1='b';  
char  varchr2='c';  
char  varchr3='d';  
char  varchr4='e';  
char  varchr5='f';  
char  varchr6='g';  
char  varchr7='h';
```

```
VARIABLE  +++  VALUE +CHR+  + ADDRESS+  
varchr0 =    0X61 = a    0x00005642d5c38038  
varchr1 =    0X62 = b    0x00005642d5c38039  
varchr2 =    0X63 = c    0x00005642d5c3803a  
varchr3 =    0X64 = d    0x00005642d5c3803b  
varchr4 =    0X65 = e    0x00005642d5c3803c  
varchr5 =    0X66 = f    0x00005642d5c3803d  
varchr6 =    0X67 = g    0x00005642d5c3803e  
varchr7 =    0X68 = h    0x00005642d5c3803f
```

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
0000 5642 D5C3 803X									'a'	'b'	'c'	'd'	'e'	'f'	'g'	'h'

# Memory Map: 00-global-variables.map

```
Memory Configuration (00-global-variables.map)
Archive member included to satisfy reference by file (symbol)
Memory Configuration
Name          Origin          Length          Attributes
*default*    0x0000000000000000 0xfffffffffffff
Linker script and memory map
== TL;DR ==
.text          0x0000000000001060      0x2d1
               0x0000000000001145      main
.tdata         0x0000000000003de8      0x0
.data          0x0000000000004038      0x8 /tmp/ccEBBZbJ.o
               0x0000000000004038      varchr0
               0x0000000000004039      varchr1
               0x000000000000403a      varchr2
               0x000000000000403b      varchr3
               0x000000000000403c      varchr4
               0x000000000000403d      varchr5
               0x000000000000403e      varchr6
               0x000000000000403f      varchr7
OUTPUT(00-global-variables elf64-x86-64)
```

# 01-local-variables

```
/* Local Variables in Stack Segment */
```

```
char  varchr0='a';  
char  varchr1='b';  
char  varchr2='c';  
char  varchr3='d';  
char  varchr4='e';  
char  varchr5='f';  
char  varchr6='g';  
char  varchr7='h';
```

```
VARIABLE +++ VALUE +CHR+ +++ ADDRESS +++  
varchr0 =    0X61 = a   0x00007fff1e3315af  
varchr1 =    0X62 = b   0x00007fff1e3315ae  
varchr2 =    0X63 = c   0x00007fff1e3315ad  
varchr3 =    0X64 = d   0x00007fff1e3315ac  
varchr4 =    0X65 = e   0x00007fff1e3315ab  
varchr5 =    0X66 = f   0x00007fff1e3315aa  
varchr6 =    0X67 = g   0x00007fff1e3315a9  
varchr7 =    0X68 = h   0x00007fff1e3315a8
```

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
0000 7FFF 1E33 15AX									'h'	'g'	'f'	'e'	'd'	'c'	'b'	'a'

# 02-pointers (LE: Little Endian)

```
char  varchr0='a';
char  varchr1='b';
char  varchr2='c';
char  varchr3='d';
char* ptrchr0=&varchr0;
char* ptrchr1=&varchr1;
char* ptrchr2=&varchr2;
char* ptrchr3=&varchr3;
VARIABLE  +++  VALUE +CHR+  +ADDRESS +          +POINTS TO+
varchr0 =      0X61 = a      0x00005650de8b0038
varchr1 =      0X62 = b      0x00005650de8b0039
varchr2 =      0X63 = c      0x00005650de8b003a
varchr3 =      0X64 = d      0x00005650de8b003b
ptrchr0 = 0x00005650de8b0038 0x00005650de8b0040      a
ptrchr1 = 0x00005650de8b0039 0x00005650de8b0048      b
ptrchr2 = 0x00005650de8b003a 0x00005650de8b0050      c
ptrchr3 = 0x00005650de8b003b 0x00005650de8b0058      d
```

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
0000 5650 DE8B 003X									'a'	'b'	'c'	'd'				
0000 5650 DE8B 004X	0000 5650 DE8B 0038								0000 5650 DE8B 0039							
0000 5650 DE8B 005X	3A	00	8B	DE	50	56	00	00	3B	00	8B	DE	50	56	00	00

# 03-pointers-of-pointers (LE)

```
=====
/* Global Variables in Data Segment*/
char  varchr0='a';
char  varchr1='b';
char  varchr2='c';
char  varchr3='d';
char* ptrchr0=&varchr0;
char* ptrchr1=&varchr1;
char* ptrchr2=&varchr2;
char* ptrchr3=&varchr3;
char** ptrptr0=&ptrchr0;
char** ptrptr1=&ptrchr1;
char** ptrptr2=&ptrchr2;
char** ptrptr3=&ptrchr3;
VARIABLE +++ VALUE +CHR+   +ADDRESS +           +POINTS TO+
varchr0 =      0X61 = a     0x000056200b034038
varchr1 =      0X62 = b     0x000056200b034039
varchr2 =      0X63 = c     0x000056200b03403a
varchr3 =      0X64 = d     0x000056200b03403b
ptrchr0 = 0x000056200b034038 0x000056200b034040      a
ptrchr1 = 0x000056200b034039 0x000056200b034048      b
ptrchr2 = 0x000056200b03403a 0x000056200b034050      c
ptrchr3 = 0x000056200b03403b 0x000056200b034058      d
ptrptr0 = 0x000056200b034040 0x000056200b034060 0x56200b034038
ptrptr1 = 0x000056200b034048 0x000056200b034068 0x56200b034039
ptrptr2 = 0x000056200b034050 0x000056200b034070 0x56200b03403a
ptrptr3 = 0x000056200b034058 0x000056200b034078 0x56200b03403b
=====
```

## 03-pointers-of-pointers (2)

### Little Endian Version A

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
0000 5620 0B03 403X									'a'	'b'	'c'	'd'				
0000 5629 0B03 404X	0000 5620 0B03 4038								0000 5620 0B03 4039							
0000 5629 0B03 405X	0000 5620 0B03 403A								0000 5620 0B03 403B							
0000 5629 0B03 406X	0000 5620 0B03 4040								0000 5620 0B03 4048							
0000 5629 0B03 407X	0000 5620 0B03 4050								0000 5620 0B03 4058							

### Little Endian Version B

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
0000 5620 0B03 403X									61	62	63	64				
0000 5620 0B03 404X	38	40	03	0B	20	56	00	00	39	40	03	0B	20	56	00	00
0000 5620 0B03 405X	3A	40	03	0B	20	56	00	00	3B	40	03	0B	20	56	00	00
0000 5620 0B03 406X	40	40	03	0B	20	56	00	00	48	40	03	0B	20	56	00	00
0000 5620 0B03 407X	50	40	03	0B	20	56	00	00	58	40	03	0B	20	56	00	00

# 04-pointers-of-pointers-of-pointers

```
/* Little Endian/OLD Version      */  
/* Global Variables in Data Segment */  
char  varchr0='a';  
char  varchr1='b';  
char  varchr2='c';  
char  varchr3='d';  
char* ptrchr0=&varchr0;  
char* ptrchr1=&varchr1;  
char* ptrchr2=&varchr2;  
char* ptrchr3=&varchr3;  
char** ptrptr0=&ptrchr0;  
char** ptrptr1=&ptrchr1;  
char** ptrptr2=&ptrchr2;  
char** ptrptr3=&ptrchr3;  
char*** ppptr0=&ptrptr0;
```

VARIABLE	+++	VALUE	+CHR+	+ADDRESS	+ +POINTS TO+
varchr0	=	0X61	= a	0x601038	
varchr1	=	0X62	= b	0x601039	
varchr2	=	0X63	= c	0x60103a	
varchr3	=	0X64	= d	0x60103b	
ptrchr0	=	0x601038		0x601040	a
ptrchr1	=	0x601039		0x601048	b
ptrchr2	=	0x60103a		0x601050	c
ptrchr3	=	0x60103b		0x601058	d
ptrptr0	=	0x601040		0x601060	0x601038
ptrptr1	=	0x601048		0x601068	0x601039
ptrptr2	=	0x601050		0x601070	0x60103a
ptrptr3	=	0x601058		0x601078	0x60103b
ppptr0	=	0x601060		0x601080	0x601040



## 04-pointers-of-pointers-of-pointers (2)

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
60103X									'a'	'b'	'c'	'd'				
60104X	601038								601039							
60105X	60103A								60103B							
60106X	601040								601048							
60107X	601050								601058							
60108X	601060															

- `***ppptr0 = **ptrptr0 = *ptrchr = varchr0`
- `ppptr0 = [601080] = 601060`
- `ptrptr0 = [601060] = 601040`
- `ptrchr0 = [601040] = 601038`
- `varchr0 = [601038] = 'a'`

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
0000 0000 0060 103X									61	62	63	64				
0000 0000 0060 104X	38	10	60	00	00	00	00	00	39	10	60	00	00	00	00	00
0000 0000 0060 105X	3A	10	60	00	00	00	00	00	3B	10	60	00	00	00	00	00
0000 0000 0060 106X	40	10	60	00	00	00	00	00	48	10	60	00	00	00	00	00
0000 0000 0060 107X	50	10	60	00	00	00	00	00	58	10	60	00	00	00	00	00
0000 0000 0060 108X	60	10	60	00	00	00	00	00								

## 05-chrptr-vs-intptr (LE)

```
=====
/* Global Variables in Data Segment*/
int    varint0=0x41424344;
char   varchr0='a';
char   varchr1='b';
char   varchr2='c';
char   varchr3='d';

int*   ptring0=&varint0;
char*  ptrchr0=&varchr0;

ptring0=(int*) &varchr2;
varint0=*ptring0;

ptrchr0=(char*) &varint0;
varchr0=*ptrchr0;

ptrchr0++;
varchr0=*ptrchr0;
```

## 05-chrptr-vs-intptr (2)

```
VARIABLE  +++  VALUE +CHR+ +ADDRESS + +POINTS TO+++  
varint0 = 0X41424344 = D    0x601038  
varchr0 =          0X61 = a    0x60103c  
varchr1 =          0X62 = b    0x60103d  
varchr2 =          0X63 = c    0x60103e  
varchr3 =          0X64 = d    0x60103f  
ptrint0 = 0x601038          0x601048    0X41424344  
ptrchr0 = 0x60103c          0x601050          a  
!!! ptrint0=(int*) &varchr1; varint0=*ptrint0; !!!  
VARIABLE  +++  VALUE +CHR+ +ADDRESS + +POINTS TO+++  
ptrint0 = 0x60103d          0x601048    0X65646362  
varint0 = 0X65646362 = b    0x601038
```

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
0000 0000 0060 103X									44	43	42	41	61	62	63	64
0000 0000 0060 104X	65								38	10	60	00	00	00	00	00
0000 0000 0060 105X	3C	10	60	00	00	00	00	00								
<hr/>																
0000 0000 0060 103X									62	63	64	65	61	62	63	64
0000 0000 0060 104X	65								3D	10	60	00	00	00	00	00

# 05-chrptr-vs-intptr (3)

```
!!! ptrchr0=(char*) &varint0; varchr0=*ptrchr0; !!!  
VARIABLE +++ VALUE +CHR+ +ADDRESS + +POINTS TO+++  
ptrchr0 = 0x601038 0x601050 0X62  
varchr0 = 0X62 = b 0x60103c  
!!!! !!!! ptrchr0++; varchr0=*ptrchr0; !!!! !!!!  
VARIABLE +++ VALUE +CHR+ +ADDRESS + +POINTS TO+++  
ptrchr0 = 0x601039 0x601050 0X63  
varchr0 = 0X63 = c 0x60103c
```

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
0000 0000 0060 103X									44	43	42	41	61	62	63	64
0000 0000 0060 104X	65								38	10	60	00	00	00	00	00
0000 0000 0060 105X	3C	10	60	00	00	00	00	00								
0000 0000 0060 103X									62	63	64	65	61	62	63	64
0000 0000 0060 104X	65								3D	10	60	00	00	00	00	00
0000 0000 0060 103X									62	63	64	65	62	62	63	64
0000 0000 0060 105X	38	10	60	00	00	00	00	00								
0000 0000 0060 103X									62	63	64	65	63	62	63	64
0000 0000 0060 105X	39	10	60	00	00	00	00	00								

# 06-pointer-address (LE)

```
unsigned char   varchr0='a';  
unsigned char* ptrchr0=&varchr0;  
unsigned char* ptrcopy=(char *) &ptrchr0;
```

```
VARIABLE  +++  VALUE  +++  +CHR+  +++  ADDRESS  +++  +PTS  TO+  
varchr0 =          0X61 = a    0x7ffe7bb7369f  
ptrchr0 = 0x7ffe7bb7369f      0x7ffe7bb73690      0X61
```

```
!!! !!!!! ptrcopy++; ptrcopy++; ptrcopy++; ... !!!!! !!!  
ptrcopy = 0x7ffe7bb73690      0x7ffe7bb73688      0X9F  
ptrcopy = 0x7ffe7bb73691      0x7ffe7bb73688      0X36  
ptrcopy = 0x7ffe7bb73692      0x7ffe7bb73688      0XB7  
ptrcopy = 0x7ffe7bb73693      0x7ffe7bb73688      0X7B  
ptrcopy = 0x7ffe7bb73694      0x7ffe7bb73688      0XFE  
ptrcopy = 0x7ffe7bb73695      0x7ffe7bb73688      0X7F  
ptrcopy = 0x7ffe7bb73696      0x7ffe7bb73688      00  
ptrcopy = 0x7ffe7bb73697      0x7ffe7bb73688      00
```

# 06-pointer-address (2)

```
!!! !!!! ptrcopy++; ptrcopy++; ptrcopy++; ... !!!! !!!  
VARIABLE +++ VALUE +++ +CHR+ +++ ADDRESS +++ +PTS TO+  
ptrchr0 = 0x7ffe7bb7369f      0x7ffe7bb73690      0X61  
ptrcopy = 0x7ffe7bb73690      0x7ffe7bb73688      0X9F  
ptrcopy = 0x7ffe7bb73691      0x7ffe7bb73688      0X36  
ptrcopy = 0x7ffe7bb73692      0x7ffe7bb73688      0XB7  
ptrcopy = 0x7ffe7bb73693      0x7ffe7bb73688      0X7B  
ptrcopy = 0x7ffe7bb73694      0x7ffe7bb73688      0XFE  
ptrcopy = 0x7ffe7bb73695      0x7ffe7bb73688      0X7F  
ptrcopy = 0x7ffe7bb73696      0x7ffe7bb73688      00  
ptrcopy = 0x7ffe7bb73697      0x7ffe7bb73688      00
```

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
0000 7FFE 7BB7 368X									90	36	B7	7B	FE	7F	00	00
0000 7FFE 7BB7 369X	9F	36	B7	7B	FE	7F	00	00								61
0000 7FFE 7BB7 368X									91	36	B7	7B	FE	7F	00	00
0000 7FFE 7BB7 368X									92	36	B7	7B	FE	7F	00	00
0000 7FFE 7BB7 368X									93	36	B7	7B	FE	7F	00	00
0000 7FFE 7BB7 368X									94	36	B7	7B	FE	7F	00	00
0000 7FFE 7BB7 368X									95	36	B7	7B	FE	7F	00	00
0000 7FFE 7BB7 368X									96	36	B7	7B	FE	7F	00	00
0000 7FFE 7BB7 368X									97	36	B7	7B	FE	7F	00	00

## 07-addresses (LE)

```
unsigned int  glInt1 = 0x41;
unsigned int  glInt2 = 0x42;
unsigned int  glInt3 = 0x43;
unsigned int  glInt4 = 0x44;
unsigned int  glInt5 = 0x45;
unsigned int* heapArray[] = {&glInt1, &glInt2, &glInt3, &glInt4, &glInt5};
```

Variable Name	Address	Size(S)/Value(V)
=====		
glInt1	0x601060	0X41 (V)
glInt2	0x601064	0X42 (V)
glInt3	0x601068	0X43 (V)
glInt4	0x60106c	0X44 (V)
heapArray---	0x601080	0X601060 (V)
heapArray[0]	0x601080	0X601060 (V)
heapArray[1]	0x601088	0X601064 (V)
heapArray[2]	0x601090	0X601068 (V)
heapArray[3]	0x601098	0X60106C (V)
heapArray[4]	0x6010a0	0X601070 (V)

## 07-addresses (2)

```
#define ALLOC0 0x4BD8
#define ALLOC1 0xFF8
#define ALLOC2 0x18
#define ALLOC3 0x19
#define ALLOC4 1
heapArray[0]=malloc(ALLOC0);
heapArray[1]=malloc(ALLOC1);
heapArray[2]=malloc(ALLOC2);
heapArray[3]=malloc(ALLOC3);
heapArray[4]=malloc(ALLOC4);
```

Variable Name	Address	Size(S)/Value(V)
=====		
heapArray---	0x601080	0X23CF420 (V)
heapArray[0]	0x601080	0X23CF420 (V)
heapArray[1]	0x601088	0X23D4000 (V)
heapArray[2]	0x601090	0X23D5000 (V)
heapArray[3]	0x601098	0X23D5020 (V)
heapArray[4]	0x6010a0	0X23D5050 (V)



## 07-addresses (3)

```
long printVariable(char* varName, void* varValue, long endAddr) { ... }
long printHeapArray(int mode) { ... }
long demoMalloc(int mode) { ... }
long tripleLoop(int mode) { ... }
void main(void)          { ... }
```

Variable Name	Address	Size(S)/Value(V)
===== printf	0x400480	
malloc	0x400490	
printVariable	0x400596	0XBE (S)
printHeapArray	0x400654	0XA3 (S)
demoMalloc	0x4006f7	0X7E (S)
tripleLoop	0x400775	0XFC (S)
main	0x400871	0X148 (S)

# 07-addresses (3)

#####

## Memory Configuration

```
0x000000000400238      (SEGMENT-START ("text-segment", 0x400000) + SIZEOF-HEADERS)

.plt      0x000000000400460      0x40 /usr/lib/gcc/.../x86-64-linux-gnu/crt1.o
          0x000000000400470      puts@@GLIBC\2.2.5
          0x000000000400480      printf@@GLIBC\2.2.5
          0x000000000400490      malloc@@GLIBC\2.2.5

.text     0x0000000004004a0      0x592
.text     0x000000000400596      0x41d /tmp/ccU78N7D.o
          0x000000000400596      printVariable
          0x000000000400654      printHeapArray
          0x0000000004006f7      demoMalloc
          0x000000000400775      tripleLoop
          0x000000000400871      main

.data     0x000000000601060      0x48 /tmp/ccU78N7D.o
          0x000000000601060      glInt1
          0x000000000601064      glInt2
          0x000000000601068      glInt3
          0x00000000060106c      glInt4
          0x000000000601070      glInt5
          0x000000000601080      heapArray
```

#####

# 08-passing-parameters

```
#define NOP()    __asm__("nop") /* No Operation inline gcc ASM *** */
#include <stdio.h>
int  varInt1   = 0x01;
int  varInt2   = 0x02;
int* ptrInt1   = &varInt1;
int* ptrInt2   = &varInt2;
void function1(void) {
    NOP();
}
void function2(int iif2) {
    printf("function2:    iif2 = %d\n", ++iif2);
}
void function3(int* iif3) {
    printf("function3:    iif3 = %d\n", ++(*iif3));
}
int  function4(void) {
    NOP();
}
int* function5(void) {
    NOP();
}
void main(void) {
    function1();
    printf("main-1:    *ptrInt1 = %d\n", *ptrInt1);
    function2(*ptrInt1);
    printf("main-2:    *ptrInt1 = %d\n", *ptrInt1);
    printf("main-3:    varInt1 = %d\n",  varInt1);
    function3(&varInt1);
    printf("main-4:    varInt1 = %d\n",  varInt1);
}
```

*// main-1: \*ptrInt1 = 1*  
*// function2: iif2 = 2*  
*// main-2: \*ptrInt1 = 1*  
*// main-3: varInt1 = 1*  
*// function3: iif3 = 2*  
*// main-4: varInt1 = 2*

# 09-struct

```
#include <stdio.h>
typedef struct {
    char* nama;
    int umur;
    int semester;
    char* NIM;
} student;

void printStruct(student* ss) {
    printf("%-10s %11s %3d %2d\n", ss->nama, ss->NIM, ss->umur, ss->semester);
}

student global;
void init(void) {
    global.nama = "Burhan";
    global.NIM = "1205000003";
    global.umur = 10;
    global.semester = 2;
}

void main(void) {
    student mhs = {"Ali", 12, 1, "1205000001"};
    printStruct(&mhs);
    init();
    printStruct(&global);
}

=====
Ali          1205000001  12  1
Burhan       1205000003  10  2
```